

01-03-00

A

12/30/99
jc710 U.S. PTO

OSTROLENK, FABER, GERB & SOFFEN, LLP
Attorneys at Law
1180 Avenue of the Americas
New York, New York 10036-8403
(212) 382-0700

Telex
23 6925
Facsimile
(212) 382-0888

Express Mail #EL010288357US

Asst. Commissioner for Patents
Washington, DC 20231

Cable
Ostrofaber NewYork

jc675 U.S. PTO
09/476241
12/30/99

OFGS File No. : P/1909-122
Inventor : Takahiro KIMOTO
Title : MOVING PICTURE ENCODING APPARATUS
Assignee : NEC Corporation

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

- 33 Pages of Specification including Abstract and Claims
- 13 Numbered Claims Calculated as 13 Claims for Fee Purposes
- 6 Sheets of Drawing Containing Figures 1 to 9.
- X Declaration and Power of Attorney
- X Priority is Claimed under 35 U.S.C. §119:
- Convention Date January 6, 1999 for Japan Appln. S.N. 11-1508
- X Certified Priority Application
- X PTO-1449 with 2 references
- X Assignment
- X Return-Addressed Post Card

OFGS Check No. 90587, which includes the fee of \$730.00, calculated as follows:

Basic Filing Fee:	\$ 690.00
Additional Filing Fees:	
Total Number of Claims in Excess of 20, times \$18:	
Number of Independent Claims in Excess of 3, times \$78:	
One or More Multiple Dependent Claims: Total \$260.	
Total Filing Fees or	690.00
Total Filing Fee Reduced 50% for Small Entity:	
Assignment Recording Fee: \$40	40.00
TOTAL Filing Fee and Assignment Recording Fee:	<u>\$ 730.00</u>

In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE

Respectfully submitted,

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL010288357US) in an envelope addressed to: Asst. Commissioner for Patents, Washington, D.C. 20231, on December 30, 1999:

Dorothy Jenkins
Name of Person Mailing Correspondence

Dorothy Jenkins
Signature

December 30, 1999
Date of Signature

Steven I. Weisburd
Steven I. Weisburd
Registration No.: 27,409
OSTROLENK, FABER, GERB & SOFFEN, LLP
1180 Avenue of the Americas
New York, New York 10036-8403
Telephone: (212) 382-0700

MOVING PICTURE ENCODING APPARATUS

BACKGROUND OF THE INVENTION

The present invention relates to for encoding successive input picture signals, and in particular, to a moving picture encoding apparatus for suppressing deterioration of picture quality due to loss of encoded data at occurrence of a transmission error.

Description of the Prior Art

In the prior art, there has been known a moving picture encoding apparatus described in Appendix H "Adaptive Intra-Refresh" of "Committee Draft 14496-2 (MPEG-4 Visual)" published from ISO/IEC JTC1/SC29/W11 in March 1998. As can be seen from Fig. 1, the encoding apparatus includes a moving picture encoding section 101 which selectively and appropriately conducts intra-frame encoding and inter-frame forecast encoding for each block as a unit of encoding. Section 101 selects a block for which the intra-frame encoding is forcibly conducted. The encoding apparatus further includes, in addition to encoding section 101, a refresh map generating section 102 and a refresh signal generating section 103. Section 102 is connected to section 101. Section 103 is connected to sections 101 and 102.

Moving picture encoding section 101 includes a motion estimating section 104, a frame memory 105, a forecast image generating section 106, a subtractor 107, a mode controller 108, a block selector 109, a two-dimensional (2D) discrete cosine transforming section 110, a quantizing section 111, a variable-length encoding section 112, a de-quantizing section 113, a two-dimensional discrete cosine inverse transforming section 114, and an adder 115.

Motion estimating section 104 detects, on receiving an input image signal 116, a set of motions between frames according to signal 116 and a reference image signal 117 stored in memory 105 to thereby

produce motion vectors 118. Motion estimating section 104 calculates for each block in input image signal 116 an error power signal 119 between the block and a block in reference image signal 117, the blocks being at an identical or associated position in the respective signals.

5 Section 104 outputs signal 119 to refresh map generating section 102. Section 102 determines a higher priority level of forced refresh for a block of which signal 119 exceeds a threshold value and produces a refresh map signal 120 indicating a forced refresh priority level of the block. Refresh signal generator 103 produces a refresh signal 122
10 specifying a block for the forced refresh according to refresh map signal 120 and an allowed block count signal 121 indicating the number of blocks for which a forced refresh operation can be conducted in one frame. Generator 103 then sends refresh signal 122 to mode controller 108 controlling an encoding mode of each block. Allowed block count
15 signal 121 is provided as an external signal according to a transmission environment of encoded data. When the number of refresh blocks is increased, although ability to conceal errors is increased, the encoding efficiency is deteriorated. Allowed block count signal 121 is a signal indicating a quantity of signals uniquely
20 determined by a tradeoff between the error concealing ability and the encoding efficiency.

On the other hand, forecast image generator 106 generates a forecast image signal 123 by conducting a motion compensating operation for reference image signal from frame memory 105 using
25 motion vector 118 from motion estimating section 104 to feed signal 123 to subtractor 107. Subtractor 107 subtracts a value of signal 123 from forecast image generator 106 from a value of input image signal 116 to produce an error signal 124 and sends signal 124 to block selector 109. Block selector 109 also receives input image signal 116.

Mode controller 108 receives input image signal 116 and refresh signal 122.

When mode controller 108 is receiving refresh signal 122 from generator 103, controller supplies a selection control signal 125 to block selector 109 to select the intra-frame encoding for a block specified by refresh signal 122. Block selector 109 accordingly selects a block (data) of input image signal 101 and supplies the data to 2D discrete cosine transformer 110. When not receiving refresh signal 122 from generator 103, mode controller 108 sends, if error signal 124 has a value equal to or less than a predetermined threshold value, selection control signal 125 to block selector 109 to select an inter-frame forecast encoding. In response thereto, selector 109 selects a block (data) of error signal 124 and feeds the data to cosine transformer 110. When not receiving refresh signal 122 from generator 103, mode controller 108 sends, if error signal 124 has a value more than a predetermined threshold value, selection control signal 125 to block selector 109 to select intra-frame forecast encoding. Selector 109 responsively selects a block (data) of input image signal 101 and feeds the data to cosine transformer 110.

Transformer 110 conducts a two-dimensional discrete cosine transformation for data selected by selector 109 to send a result of the transformation to quantizing section 111. Section 111 quantizes the data and delivers a quantized signal to variable-length encoding section 112. Section 112 accomplishes a variable-length encoding for the data received to resultantly produce output data 126. De-quantizing section 113 receives the data from quantizing section 111 to de-quantize the data and feeds a dequantized result to two-dimensional discrete cosine inverse transformer 114. Section 114 conducts a two-dimensional discrete cosine inverse transformation for the data from de-quantizing section 113 and delivers an inversely

transformed result to adder 115. Adder 115 adds a value of data from inverse transformer 114 to a value of forecast image signal 123 from generator 106 to produce reference image signal 127 and stores signal 127 in frame memory 105.

5 Fig. 2 shows in a schematic diagram a method of concealing errors on a decoding side in the encoding method of the prior art. For a block in which data is lost due to a transmission error, the missing data is compensated for by copying onto the block a block at the same position in a frame preceding the pertinent frame. In the encoding
10 method, even when data losses take place, picture quality can be kept at a desired level by selectively conducting a forced refresh operation for blocks greatly deteriorated in picture quality as a result of the compensating operation. As above, the moving picture encoder of the prior art forcibly refreshes blocks of which deterioration in picture
15 quality exceeds threshold value in the error concealing operation. Namely, the apparatus refreshes these blocks at a period according to an equal probability.

However, in the moving picture encoder of the prior art, a frequency of forced refresh operations to determine efficiency of the
20 error concealment and a threshold value to determine the refresh candidate blocks depend on a transmission environment and distribution of image. This consequently leads to a problem that an area which particularly influences picture quality is not effectively refreshed and even when the error concealment is achieved, an image
25 resultantly obtained has only a low rank according to a subjective evaluation.

In the moving picture encoder of the prior art, only a simple error concealing operation is to be conducted on a decoding side. There consequently arises a problem that even when the decoding side

employs a higher-level error concealing operation, the picture quality cannot be improved.

SUMMARY OF THE INVENTION

5 It is therefore an object of the present invention to provide a moving picture encoding apparatus capable of preventing deterioration of picture quality even in an environment in which transmission errors frequently occur during data transmission.

To achieve the object above in accordance with a first aspect
10 of the present invention, there is provided a moving picture encoding apparatus for encoding successive input image signals. The apparatus includes block significance determining means for determining block significance for each block as an encoding unit of the input image signals according to evaluation indices predetermined; map generating
15 means for generating, according to the block significance, a refresh map signal representing priority of refresh processing for each block; adaptive refresh signal generating means for referring to refresh priority indicated by the refresh map signal and an allowed number of blocks for refresh processing in a frame to be encoded, selecting a block
20 for refresh processing, and generating a refresh signal specifying the block for refresh processing; and moving picture encoding means for conducting an intra-frame encoding operation for a block specified by the refresh signal and for appropriately selecting and executing an intra-frame encoding operation or an inter-frame forecast encoding
25 operation for a block not specified by the refresh signal.

In accordance with a second aspect of the present invention, the block significance determining means includes block feature calculating means for calculating for each block a block feature which
30 is a quantity representing a feature of signal distribution of the block and a visual characteristic of the block and significance generating

means for comparing the block feature with one or more threshold values and thereby generating block significance for each block.

In accordance with a third aspect of the present invention, the block significance determining means includes block feature
5 calculating means for calculating a block feature which is a quantity indicating a variance of intra-block signals and significance generating means for comparing the block feature with one or more threshold values and thereby generating block significance for each block.

In accordance with a fourth aspect of the present invention,
10 the block significance determining means includes block feature calculating means for calculating for each block a block feature which is a quantity indicating power of a signal obtained by passing intra-block signals through a band-pass filter and significance generating
15 means for comparing the block feature with one or more threshold values and thereby generating block significance for each block.

In accordance with a fifth aspect of the present invention, there is provided a moving picture encoding apparatus for encoding successive input image signals. The apparatus includes block
20 significance determining means for determining block significance for each block as an encoding unit of the input image signals according to block information and evaluation indices predetermined; map generating means for generating, according to the block significance, a refresh map signal representing priority of refresh processing for each
25 block; adaptive refresh signal generating means for referring to refresh priority indicated by the refresh map signal and an allowed number of blocks for refresh processing in a frame to be encoded, selecting a block for refresh processing, and generating a refresh signal specifying the block for refresh processing; and moving picture encoding means for
30 generating the block information indicating power of an error between frames and a quantity of motion generated during a block encoding

operation and sending the block information to the block significance determining means, for conducting an intra-frame encoding operation for a block specified by the refresh signal and for appropriately selecting, and for executing an intra-frame encoding operation or an
 5 inter-frame forecast encoding operation for a block not specified by the refresh signal.

In accordance with a sixth aspect of the present invention, the block significance determining means includes block feature calculating means for calculating for each block a block feature which
 10 is a quantity representing a feature of signal distribution of the block and a visual characteristic of the block, first significance generating means for comparing the block feature with one or more threshold values and thereby generating first block significance for each block; visual deterioration calculating means for calculating for each block,
 15 according to the block information, a quantity of visual deterioration representing a degree of visual picture deterioration when a forecast error signal is lost; second significance generating means for comparing the quantity of visual deterioration with one or more threshold values and thereby generating second block significance for
 20 each block; and block significance totaling means for combining the first block significance with the second block significance and supplying resultant block significance to the map generating means.

In accordance with a seventh aspect of the present invention, the block significance determining means includes block feature
 25 calculating means for calculating for each block a block feature which is a quantity representing a feature of signal distribution of the block and a visual characteristic of the block, first significance generating means for comparing the block feature with one or more threshold values and thereby generating first block significance for each block,
 30 visual deterioration calculating means for calculating for each block a

quantity of visual deterioration representing a quantity of power of an error between a block in the input image signal and a block in a reference frame, the blocks being respectively at the same position; second significance generating means for comparing the quantity of visual deterioration with one or more threshold values and thereby generating second block significance for each block; and block significance totaling means for combining the first block significance with the second block significance and supplying resultant block significance to the map generating means.

In accordance with an eighth aspect of the present invention, the block significance determining means includes block feature calculating means for calculating for each block a block feature which is a quantity representing a feature of signal distribution of the block and a visual characteristic of the block, first significance generating means for comparing the block feature with one or more threshold values and thereby generating first block significance for each block, visual deterioration calculating means for calculating for each block a quantity of visual deterioration representing a quantity of power of an error between a block in the input image signal and a block in a reference frame obtained by inter-frame forecast processing, the blocks being respectively at the same position; second significance generating means for comparing the quantity of visual deterioration with one or more threshold values and thereby generating second block significance for each block; and block significance totaling means for combining the first block significance with the second block significance and supplying resultant block significance to the map generating means.

In accordance with a ninth aspect of the present invention, the block significance determining means includes block feature calculating means for calculating for each block a block feature which

is a quantity representing a feature of signal distribution of the block and a visual characteristic of the block, first significance generating means for comparing the block feature with one or more threshold values and thereby generating first block significance for each block,

5 visual deterioration calculating means for calculating for each lock a quantity of visual deterioration representing a quantity obtained by weighting, according to a quantity of motion of a block, power of an error between a block in the input image signal and a block in a reference frame, the blocks being respectively at the same position,

10 second significance generating means for comparing the quantity of visual deterioration with one or more threshold values and thereby generating second block significance for each block, and block significance totaling means for combining the first block significance with the second block significance and supplying resultant block

15 significance to the map generating means.

In accordance with a tenth aspect of the present invention, the block significance determining means includes block feature calculating means for calculating for each block a block feature which is a quantity representing a feature of signal distribution of the block

20 and a visual characteristic of the block, first significance generating means for comparing the block feature with one or more threshold values and thereby generating first block significance for each block, visual deterioration calculating means for calculating for each block a quantity of visual deterioration representing a quantity obtained by

25 weighting, according to a quantity of motion of a block, power of an error between a block in the input image signal and a block in a reference frame obtained by inter-frame forecast processing, the blocks being respectively at the same position; second significance generating means for comparing the quantity of visual deterioration with one or

30 more threshold values and thereby generating second block

significance for each block; and block significance totaling means for combining the first block significance with the second block significance and supplying resultant block significance to the map generating means.

5 In accordance with an 11th aspect of the present invention, the block significance determining means includes block feature calculating means for referring to information of a change in luminance of intra-block signals and a luminance level, thereby generating sensitivity information for the information according visual
10 characteristics of a human, and calculating the sensitivity information as a quantity of a block feature; first significance generating means for comparing the block feature with one or more threshold values and thereby generating first block significance for each block, visual deterioration calculating means for calculating for each block,
15 according to the block information, a quantity of visual deterioration representing a degree of visual picture deterioration when a forecast error signal is lost; second significance generating means for comparing the quantity of visual deterioration with one or more threshold values and thereby generating second block significance for
20 each block; and block significance totaling means for combining the first block significance with the second block significance and supplying resultant block significance to the map generating means.

In accordance with a 12th aspect of the present invention, there is provided a moving picture encoding apparatus for encoding
25 successive input image signals. The apparatus includes block significance determining means for determining block significance for each block as an encoding unit of the input image signals according to evaluation indices predetermined, map generating means for generating, according to the block significance, a refresh map signal
30 representing priority of refresh processing for each block; refresh

history determining means for temporarily keeping therein the refresh map signal from the map generating means, referring to history of the refresh map signal and a refresh signal, modifying a value of forced refresh priority indicated by the refresh map signal, and thereby generating a modified refresh map signal; adaptive refresh signal generating means for referring to refresh priority indicated by the refresh map signal and an allowed number of blocks for refresh processing in a frame to be encoded, selecting a block for refresh processing, and generating the refresh signal specifying the block for refresh processing; and moving picture encoding means for conducting an intra-frame encoding operation for a block specified by the refresh signal and for appropriately selecting and executing an intra-frame encoding operation or an inter-frame forecast encoding operation for a block not specified by the refresh signal.

In accordance with a 13th aspect of the present invention, the refresh history determining means includes a map history memory for referring to the refresh map signal from the map generating means and the refresh signal from the adaptive refresh signal generating means, thereby updating history, beginning at a start of encoding processing, of a refresh map, and storing therein the refresh map; a refresh signal history memory for storing therein history of the refresh signal, and a map modifying section for referring to the map history stored in the map history memory and the refresh history stored in the refresh signal history memory and thereby modifying forced refresh priority indicated by the refresh map signal from the map generating means.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects and features of the present invention will become more apparent from the consideration of the following detailed

description taken in conjunction with the accompanying drawings in which:

Fig. 1 is a block diagram showing a moving picture encoding apparatus of the prior art;

5 Fig. 2 is a diagram for explaining an error concealing operation in the moving picture encoding apparatus of the prior art;

Fig. 3 is a block diagram showing a first embodiment of a moving picture encoding apparatus in accordance with the present invention;

10 Fig. 4 is a block diagram showing a block significance determining section of the first embodiment;

Fig. 5 is a block diagram showing a second embodiment of a moving picture encoding apparatus in accordance with the present invention;

15 Fig. 6 is a block diagram showing a block significance determining section of the second embodiment;

Fig. 7 is a schematic diagram for explaining a high-level error concealing operation using a quantity of motion in the second embodiment;

20 Fig. 8 is a block diagram schematically showing a third embodiment of a moving picture encoding apparatus in accordance with the present invention; and

Fig. 9 is a block diagram showing a refresh history determining section in the third embodiment.

25

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings, description will be given of an embodiment of the present invention.

As shown in Fig. 3, the first embodiment of the moving
30 picture encoding apparatus in accordance with the present invention

includes a moving picture encoding section 1, a block significance determining section, a map generator 3, and an adaptive refresh signal generator 4. Section 2 receives an input image signal 5. Map generator 3 is connected to section 2. Adaptive refresh signal generator 4 is connected to encoding section 1 and map generator 3.

Encoding section 1 includes a motion estimating section 6, a frame memory 7, a forecast image generator 8, a subtractor 9, a mode controller 10, a block selector 11, a two-dimensional discrete cosine transformer 12, a quantizing section 13, a variable-length encoding section 14, a de-quantizing section 15, a two-dimensional discrete cosine inverse transformer 16, and an adder 17. Motion estimating section 6 receives input image signal 5. Frame memory 7 is connected to section 6. Forecast image generator 8 is connected to section 6 and memory 7. Subtractor 9 receives input image signal 5 and is connected to forecast image generator 8. Mode controller 10 receives input image signal 5 and is connected to signal generator 4 and subtractor 9. Block selector 11 receives input image signal 5 and is connected to subtractor 9 and mode controller 10. Discrete cosine transformer 12 is connected to block selector 11. Quantizing section 13 is linked with transformer 12. Variable-length encoding section 14 is connected to section 13. De-quantizing section 15 is coupled with quantizing section 13. discrete cosine inverse transformer 16 is connected to de-quantizing section 15. Adder 17 is connected to forecast image generator 8 and inverse transformer 16.

Motion estimating section 6 detects, on receiving image signal 5, a set of motions between frames according to signal 5 and a reference image signal 18 stored in memory 7 to produce a motion vectors 19. Forecast image generator 8 conducts motion compensating operation for signal 18 from memory 7 according to motion vector 19 from motion estimating section 6 to produce a forecast image signal 20 and sends

signal 20 to subtractor 9. Subtractor 9 subtracts a value of signal 20 from generator 8 from a value of image signal 5 to create an error signal 21 and sends signal 21 to block selector 11. Block selector 11 also receives image signal 5. Mode controller 10 receives signal 5 and error signal 21, and a refresh signal from adaptive refresh signal generator 4.

When controller 10 is receiving refresh signal 22 from generator 4, mode controller 10 sends a selection control signal 23 to block selector 11 to select an intra-frame encoding operation for a block specified by refresh signal 22. Block selector 11 therefore selects a block (data) of input image signal 5 and supplies the block to cosine transformer 12. When controller 10 is not receiving refresh signal 22 from generator 4, mode controller 10 sends a selection control signal 23 to block selector 11 to select an inter-frame encoding operation if error signal 21 takes a value equal to or less than a predetermined threshold value. In response thereto, selector 11 selects a block (data) of error signal 21 to send the data to cosine transformer 12. If error signal 21 takes a value equal to or more than a predetermined threshold value when controller 10 is not receiving refresh signal 22 from generator 4, mode controller 10 sends a selection control signal 23 to block selector 11 to select an intra-frame encoding operation. In response thereto, selector 11 selects a block (data) of image signal 5 to send the data to cosine transformer 12.

Transformer 12 conducts a two-dimensional discrete cosine transformation for the data selected by selector 10 and delivers a result of the transformation to quantizing section 13. Section 13 quantizes the data to feed resultant data to variable-length encoding section 14. Section 14 achieves a variable-length encoding operation for the data to generate output data 24. De-quantizing section 15 receiving data from quantizing section 13 to de-quantize the data and

sends resultant data to cosine inverse transformer 16. Inverse transformer 16 conducts a two-dimensional discrete cosine inverse transformation for the data to deliver a result of the inverse transformation to adder 17. Adder 17 adds a value of data from
 5 inverse transformer 16 to a value of forecast image signal 20 from forecast image generator 8 to store resultant data in frame memory 7.

Block significance determining section 2 refers to input image signal 5 to produce block significance 26 indicating significance for each block of signal 5. Map generator 3 interprets block significance
 10 26 from section 2 as priority to execute a forced refresh operation and therefore generates a refresh map signal 27 representing refresh priority for each block of signal 5 and sends signal 27 to adaptive refresh signal generator 4. Generator 4 generates refresh signal 22 specifying a block to be forcibly refreshed according to refresh map
 15 signal 27 and an allowable block count signal 28 indicating an allowable number of blocks for which the forced refresh operation can be conducted in one frame and transmits signal 22 to mode controller 10. Signal 28 is provided as an external signal according to a data transmission environment. When the number of refresh blocks is
 20 increased, the encoding efficiency is lowered although ability to conceal errors is improved. Signal 28 indicates a quantity uniquely determined by a tradeoff between the error concealing capability and the encoding efficiency for a predetermined transmission rate.

Fig. 4 shows block significance determining section 2. Section 2 includes a block feature calculating section 29 and a
 25 significance generator 30. Section 29 receives input image signal 5. Generator 30 is connected to calculating section 29 and map generator 3. For each block of image signal 5, calculating section calculates a block feature 31 representing importance regarding improvement of
 30 picture quality. The importance represents a degree of a ratio of

visually important information such as a contour or easiness of subjective perception of deterioration in picture quality. The first embodiment employs, for the block feature, a variance of component of luminance or color difference representing variation of intra-block signals, weighted sum thereof, and a quantity representing power of an edge component obtained by a high-pass filter or another edge extracting filter. An area having a large value of variance in a block and an area of a contour provide visually important information and strongly influence the subjective picture quality. Other block features may be distance between a maximum value and a minimum value of intra-block signals, a difference between power of a luminance signal of a pertinent block and power of a luminance signal of a block adjacent thereto, a difference between power of a color difference signal of a pertinent block and power of a color difference signal of a block adjacent thereto, and a weighted sum of coefficient signals, after a frequency conversion, according to a visual model and saturation (absolute value of a color difference signal).

Significance generator 30 compares block feature with a predetermined threshold value to generate block significance 26. Generator 30 has one or a plurality of threshold values and compares feature 31 with the values to obtain block significance 26. Adaptive refresh signal generator 4 adaptively achieves a refresh operation according to refresh priority indicated by refresh map signal 27, for example, uses a short refresh period for a block with high priority and a long refresh period for a block with low priority.

Description will now be given of a second embodiment of the present invention by referring to the drawings. In the second embodiment, the same constituent components of those of the first embodiment are assigned with the same reference numerals. In the second embodiment, block significance determining section 2 generates

block significance 26 by referring to, in addition to input image signal 5, block information 33 generated during a block encoding operation by a block information generator 32 of moving picture encoding section 1.

Fig. 6 shows block significance determining section 2 in the second embodiment. Section 2 includes a block feature calculating section, a significance generator 30, a visual deterioration calculating section 34, a significance generator 35, and a block significance totaling section 36. Visual deterioration calculating section 34 is connected to block information generator 32 of encoding section 1. Section 34 receives block information 33 from generator 32. Significance generator 35 is connected to section 34. Totaling section 36 is linked with significance generators 30 and 35 and map generator 3. Generator 30 compares block feature 31 with one or more predetermined threshold values predetermined to generate block significance 37. Calculating section 34 refers to block information 33 to calculate visual deterioration 38 representing a degree of visual deterioration of a picture for each block when forecast error signals are lost. Significance generator 35 compares visual deterioration 38 with a predetermined threshold value to create block significance 39. Generator 35 has one or more values to compare visual deterioration with the threshold values to set block significance 26 as a result.

Block information 33 includes, in addition to first error power with respect to a block at the same position of the reference frame used in the apparatus of the prior art, second error power with respect to a block at the same position in a forecast image for which a motion compensation has been conducted and a quantity of motion of a block. Visual deterioration 38 includes, in addition to the first and second error power and the quantity of block motion, a product between a quantity of motion and error power. The error power indicates energy of a signal lost at occurrence of an error. Moreover, in blocks having

the same error power, a block with a larger quantity in motion between frames possibly propagates picture quality deterioration in a broader area. Consequently, the error power may be weighted by the quantity of motion.

5 Block significance totaling section 36 totals block significance 37 from significance generator 30 and block significance 39 from significance generator 35 to produce block significance 26 and sends block significance 26 to map generator 3. If significance is represented in binary notation in section 36, a logical sum or product is produced as
10 the total value. If significance is represented in multi-value notation, a total of an addition or a result of a multiplication is generated as the total value.

 In the apparatus of the prior art, the evaluation value of picture quality deterioration in the error concealing operation is error
15 power with respect to a block at the same position in a reference frame, and the forced refresh priority is set with an equal probability for the blocks for which the error power is equal to or more than a predetermined threshold value. On the other hand, in the second
20 embodiment of the present invention, among the blocks as candidates for refresh processing, those particularly influence the improvement of picture quality in the error concealing operation can take precedence in the refresh operation. Such blocks influencing the improvement of picture quality contain visually important information such as the contour information described above.

25 As a characteristic of sense of sight of a human, for blocks having almost equal error power, sensitivity to deterioration in picture quality increases for those having average luminance at about an intermediate level. It has been known that sensitivity is further increased for the block having a great change in luminance. Block
30 feature calculating section 29 of Fig. 6 calculates, according to an

average and a variance of intra-block signals, information of sensitivity to picture quality deterioration in consideration of characteristics of sense of sight of a human. Block significance 37 produced by significance generator 30 using the information of sensitivity as block
5 feature 31 is combined with block significance 39 generated by significance generator 35 using visual deterioration 38. This makes it possible to preferentially refresh, among the blocks having considerable deterioration in picture quality, the blocks particularly conspicuous for the sense of sight. The second embodiment therefore
10 can improve the picture quality in the error concealing operation when compared with the apparatus of the prior art.

"Committee Draft 14496-2 (MPEG-4 Visual)" published from ISO/IEC JTC1/SC29/WG11 describes, as a data transmission method in a transmission environment in which tolerance is required for the
15 method, a method in which a quantity of motion and information of conversion coefficients used in inter-frame forecast encoding are transmitted independently of each other. In the transmission method, when a data loss occurs in the information of conversion coefficients due to an error, a highly efficient operation to conceal the error can be
20 achieved. Namely, a forecast image can be generated through a motion compensating operation using a reference frame and a quantity of motion, and the forecast image is copied onto a pertinent block as shown in Fig. 7. However, in the forced refresh operation used by the apparatus of the prior art, error power with respect to a block at the
25 same position on a reference frame is employed as an evaluation value for the forced refresh operation. In consequence, it is impossible to effectively select blocks having considerable deterioration in picture quality. In this situation, a forced refresh operation using the second error power, i.e., power of the forecast error signal is effectively

applicable. For this purpose, the second embodiment can efficiently control the encoding operation.

Next, description will be given in detail of a third embodiment in accordance with the present invention. In the third embodiment, the same constituent elements as those of the first embodiment are assigned with the same reference numerals. The third embodiment of a moving picture encoding apparatus is implemented by adding a refresh history determining section 40 to the moving picture encoding apparatus of Fig. 3 as shown in Fig. 8. That is, the moving picture encoding apparatus includes moving picture encoding section 1, block significance determining section 2, map generator 3, refresh history determining section 40, and adaptive refresh signal generator 4. Section 2 receives input image signal 5. Map generator 3 is connected to section 2. Section 40 is coupled with generator 3. Signal generator 4 is connected to encoding section 1 and determining section 40. Section 40 refers to refresh signal from generator 4 and refresh map signal 27 from map generator 3 to update information regarding history of refresh operation. Section 40 modifies refresh map signal 27 using the history information to generate a modified refresh map signal 41 and sends signal 41 to adaptive refresh signal generator 4.

Fig. 9 shows refresh history determining section 40. Section 40 includes a map history memory 42, a refresh signal history memory 43, and a map modifying section 44. Map memory 42 is connected to map generator 3. Map history memory 42 receives refresh map signal 27 from map generator 3. Memory 43 is linked with adaptive refresh signal generator 4 and receives refresh signal from adaptive refresh signal generator 4. Map modifying section 44 is connected to map history memory 42, refresh signal history memory 43, and adaptive refresh signal generator 4.

Stored in map history memory 42 is map history 45 indicating information regarding accumulation, beginning at the start point of encoding, of forced refresh priority indicated by refresh map signal 27 and information regarding a lapse time for a block from when the block had high refresh priority to the current point of time. In the moving picture encoding apparatus of the prior art or the present invention, an allowed block count signal is used to indicate the number of allowed blocks for refreshment in one frame according to the data transmission environment. The count signal determines a block to be refreshed. In consequence, there exists a block which is not actually refreshed even if the block has high priority for the forced refresh operation. At occurrence of a block which has high refresh priority at a time and low refresh priority thereafter, namely, at appearance of a missing data in an area in which data little moves between frames after a point of time, if a refresh operation is not executed at a point of a motion, a block having considerable deterioration in picture quality is continuously used as a forecast image. Each time refresh map signal 27 is inputted to map history memory 42, the refresh priority is accumulated to update map history 45. At the same time, when a value of map history 45 is equal to or more than a threshold value and the refresh priority indicated by refresh map signal 27 is zero, a predetermined value is added to the accumulated refresh priority in map history 45. At occurrence of refresh signal 22, map history memory 42 refers to signal 22 to reset, for the pertinent block refreshed, the accumulated refresh priority in map history 45 to zero. Map modifying section 44 refers to map history 45 to detect a block of which the accumulated refresh priority exceeds a threshold value and increases refresh priority thereof in refresh map signal 27.

Refresh signal history memory 43 contains refresh signal history 46 which is information indicating a position of a block actually

refreshed in several preceding frames. Memory 43 updates refresh signal history 46 when refresh signal 22 is received and outputs refresh signal history 46 in an encoding stage of a subsequent frame. Map modifying section 44 refers to history 46 to lower, for each block refreshed in several preceding frames, the refresh priority associated therewith in refresh map signal 27.

For example, the picture encoding method of the prior art described in JP-A-4-176291 employs an encoding control method in which whether or not an intra-frame encoding or inter-frame encoding operation is selected in an encoding operation of a block of an input image is monitored. When an inter-frame forecast signal is consecutively selected at least for a predetermined period of time, a forced refresh operation is conducted in a subsequent frame. In contrast therewith, the third embodiment of the present invention refers to the history of the refresh map to detect, among blocks for which the inter-frame forecast signal is successively selected, a block influencing deterioration of picture quality and to thereby preferentially refreshes the block. Consequently, the picture encoding operation can be more efficiently achieved as compared with the prior art. It may also be possible to combine the second embodiment with the third embodiment in accordance with the present invention.

In the embodiments of the present invention, the forced refresh priority is increased for a significant block selected by block significance determining section 2 to preferentially refresh an area influencing subjective picture quality. This advantageously suppresses deterioration in picture quality when a data loss occurs during data transmission. In the embodiments, by using the method of prior art utilizing information obtained when block significance determining section 2 detects a motion, it is possible to implement an adaptive error concealing operation. In the third embodiment of the present

invention, refresh history determining section 40 refers to the history of the refresh map to prevent an event in which an area with considerable deterioration of picture quality is not refreshed and is consecutively displayed.

5 In accordance with the present invention, while the number of blocks to be forcibly refreshed is limited, forced refresh priority can be assigned to blocks in consideration of blocks influencing deterioration of picture quality such as blocks in which important information of an image such as contour information or an area
10 visually conspicuous in an image is not refreshed and is remaining or blocks which are not refreshed and which are disadvantageously remaining in a frame. Therefore, the error concealing operation can be appropriately conducted. Consequently, the data lost at occurrence of an error can be appropriately restored to thereby improve picture
15 quality.

While the present invention has been described with reference to the particular illustrative embodiments, it is not to be restricted by those embodiments but only by the appended claims. It is to be appreciated that those skilled in the art can change or modify the
20 embodiments without departing from the scope and spirit of the present invention.

WHAT IS CLAIMED IS:

1. A moving picture encoding apparatus for encoding successive input image signals, comprising:

block significance determining means for determining block significance for each block as an encoding unit of the input image signals according to evaluation indices predetermined;

map generating means for generating, according to the block significance, a refresh map signal representing priority of refresh processing for each block;

adaptive refresh signal generating means for referring to refresh priority indicated by the refresh map signal and an allowed number of blocks for refresh processing in a frame to be encoded, selecting a block for refresh processing, and generating a refresh signal specifying the block for refresh processing; and

moving picture encoding means for conducting an intra-frame encoding operation for a block specified by the refresh signal and for appropriately selecting and executing an intra-frame encoding operation or an inter-frame forecast encoding operation for a block not specified by the refresh signal.

2. A moving picture encoding apparatus in accordance with claim 1, wherein

the block significance determining means includes:

block feature calculating means for calculating for each block a block feature which is a quantity representing a feature of signal distribution of the block and a visual characteristic of the block; and

significance generating means for comparing the block feature with one or more threshold values and thereby generating block significance for each block.

3. A moving picture encoding apparatus in accordance with claim 1, wherein

the block significance determining means includes:

5 block feature calculating means for calculating a block feature which is a quantity indicating a variance of intra-block signals; and

significance generating means for comparing the block feature with one or more threshold values and thereby generating block significance for each block.

4. A moving picture encoding apparatus in accordance with claim 1, wherein

the block significance determining means includes:

5 block feature calculating means for calculating for each block a block feature which is a quantity indicating power of a signal obtained by passing intra-block signals through a band-pass filter; and

significance generating means for comparing the block feature with one or more threshold values and thereby generating block significance for each block.

5. A moving picture encoding apparatus for encoding successive input image signals, comprising:

5 block significance determining means for determining block significance for each block as an encoding unit of the input image signals according to block information and evaluation indices predetermined;

map generating means for generating, according to the block significance, a refresh map signal representing priority of refresh processing for each block;

10 adaptive refresh signal generating means for referring to refresh priority indicated by the refresh map signal and an allowed number of blocks for refresh processing in a frame to be encoded, selecting a block for refresh processing, and generating a refresh signal specifying the block for refresh processing; and

15 moving picture encoding means for generating the block information indicating power of an error between frames and a quantity of motion generated during a block encoding operation and sending the block information to the block significance determining means, for conducting an intra-frame encoding operation for a block
20 specified by the refresh signal and for appropriately selecting, and for executing an intra-frame encoding operation or an inter-frame forecast encoding operation for a block not specified by the refresh signal.

6. A moving picture encoding apparatus in accordance with claim 5, wherein

the block significance determining means includes:

5 block feature calculating means for calculating for each block a block feature which is a quantity representing a feature of signal distribution of the block and a visual characteristic of the block;

first significance generating means for comparing the block feature with one or more threshold values and thereby generating first block significance for each block;

10 visual deterioration calculating means for calculating for each block, according to the block information, a quantity of visual deterioration representing a degree of visual picture deterioration when a forecast error signal is lost;

15 second significance generating means for comparing the quantity of visual deterioration with one or more threshold values and thereby generating second block significance for each block; and

block significance totaling means for combining the first block significance with the second block significance and supplying resultant block significance to the map generating means.

7. A moving picture encoding apparatus in accordance with claim 5, wherein

the block significance determining means includes:

block feature calculating means for calculating for each block

5 a block feature which is a quantity representing a feature of signal distribution of the block and a visual characteristic of the block;

first significance generating means for comparing the block feature with one or more threshold values and thereby generating first block significance for each block;

10 visual deterioration calculating means for calculating for each block a quantity of visual deterioration representing a quantity of power of an error between a block in the input image signal and a block in a reference frame, the blocks being respectively at the same position;

15 second significance generating means for comparing the quantity of visual deterioration with one or more threshold values and thereby generating second block significance for each block; and

20 block significance totaling means for combining the first block significance with the second block significance and supplying resultant block significance to the map generating means.

8. A moving picture encoding apparatus in accordance with claim 5, wherein

the block significance determining means includes:

block feature calculating means for calculating for each block
 5 a block feature which is a quantity representing a feature of signal
 distribution of the block and a visual characteristic of the block;

first significance generating means for comparing the block
 feature with one or more threshold values and thereby generating first
 block significance for each block;

10 visual deterioration calculating means for calculating for
 each block a quantity of visual deterioration representing a quantity of
 power of an error between a block in the input image signal and a
 block in a reference frame obtained by inter-frame forecast processing,
 the blocks being respectively at the same position;

15 second significance generating means for comparing the
 quantity of visual deterioration with one or more threshold values and
 thereby generating second block significance for each block; and

block significance totaling means for combining the first block
 significance with the second block significance and supplying resultant
 20 block significance to the map generating means.

9. A moving picture encoding apparatus in accordance with
 claim 5, wherein

the block significance determining means includes:

block feature calculating means for calculating for each block
 5 a block feature which is a quantity representing a feature of signal
 distribution of the block and a visual characteristic of the block;

first significance generating means for comparing the block
 feature with one or more threshold values and thereby generating first
 block significance for each block;

10 visual deterioration calculating means for calculating for
 each lock a quantity of visual deterioration representing a quantity
 obtained by weighting, according to a quantity of motion of a block,

power of an error between a block in the input image signal and a block in a reference frame, the blocks being respectively at the same position;

second significance generating means for comparing the quantity of visual deterioration with one or more threshold values and thereby generating second block significance for each block; and

block significance totaling means for combining the first block significance with the second block significance and supplying resultant block significance to the map generating means.

10. A moving picture encoding apparatus in accordance with claim 5, wherein

the block significance determining means includes:

block feature calculating means for calculating for each block a block feature which is a quantity representing a feature of signal distribution of the block and a visual characteristic of the block;

first significance generating means for comparing the block feature with one or more threshold values and thereby generating first block significance for each block;

visual deterioration calculating means for calculating for each block a quantity of visual deterioration representing a quantity obtained by weighting, according to a quantity of motion of a block, power of an error between a block in the input image signal and a block in a reference frame obtained by inter-frame forecast processing, the blocks being respectively at the same position;

second significance generating means for comparing the quantity of visual deterioration with one or more threshold values and thereby generating second block significance for each block; and

block significance totaling means for combining the first block
 20 significance with the second block significance and supplying resultant
 block significance to the map generating means.

11. A moving picture encoding apparatus in accordance with
 claim 5, wherein

the block significance determining means includes:

block feature calculating means for referring to information
 5 of a change in luminance of intra-block signals and a luminance level,
 thereby generating sensitivity information for the information
 according visual characteristics of a human, and calculating the
 sensitivity information as a quantity of a block feature;

first significance generating means for comparing the block
 10 feature with one or more threshold values and thereby generating first
 block significance for each block;

visual deterioration calculating means for calculating for
 each block, according to the block information, a quantity of visual
 deterioration representing a degree of visual picture deterioration
 15 when a forecast error signal is lost;

second significance generating means for comparing the
 quantity of visual deterioration with one or more threshold values and
 thereby generating second block significance for each block; and

block significance totaling means for combining the first block
 20 significance with the second block significance and supplying resultant
 block significance to the map generating means.

12. A moving picture encoding apparatus for encoding
 successive input image signals, comprising:

block significance determining means for determining block
significance for each block as an encoding unit of the input image
5 signals according to evaluation indices predetermined;

map generating means for generating, according to the block
significance, a refresh map signal representing priority of refresh
processing for each block;

refresh history determining means for temporarily keeping
10 therein the refresh map signal from the map generating means,
referring to history of the refresh map signal and a refresh signal,
modifying a value of forced refresh priority indicated by the refresh
map signal, and thereby generating a modified refresh map signal;

adaptive refresh signal generating means for referring to
15 refresh priority indicated by the refresh map signal and an allowed
number of blocks for refresh processing in a frame to be encoded,
selecting a block for refresh processing, and generating the refresh
signal specifying the block for refresh processing; and

moving picture encoding means for conducting an intra-frame
20 encoding operation for a block specified by the refresh signal and for
appropriately selecting and executing an intra-frame encoding
operation or an inter-frame forecast encoding operation for a block not
specified by the refresh signal.

13. A moving picture encoding apparatus in accordance with
claim 12, wherein

the refresh history determining means includes:

a map history memory for referring to the refresh map signal
5 from the map generating means and the refresh signal from the
adaptive refresh signal generating means, thereby updating history,
beginning at a start of encoding processing, of a refresh map, and
storing therein the refresh map;

ABSTRACT OF THE DISCLOSURE

Deterioration of picture quality is prevented even in a transmission environment in which errors easily occur. A block significance determining section produces block significance for each block as an encoding unit according to predetermined evaluation indices. A map generator generates a refresh map signal representing priority of refresh processing for each block according to the block significance. An adaptive refresh signal generator generates a refresh signal by referring to the refresh priority indicated by the refresh map signal and an allowed block count of blocks for the refresh processing. A moving picture encoding section conducts an intra-frame encoding operation for a block specified by the refresh signal and appropriately selects and executes an intra-frame encoding operation or inter-frame forecast encoding operation for blocks not specified by the refresh signal.

FIG. 1

PRIOR ART

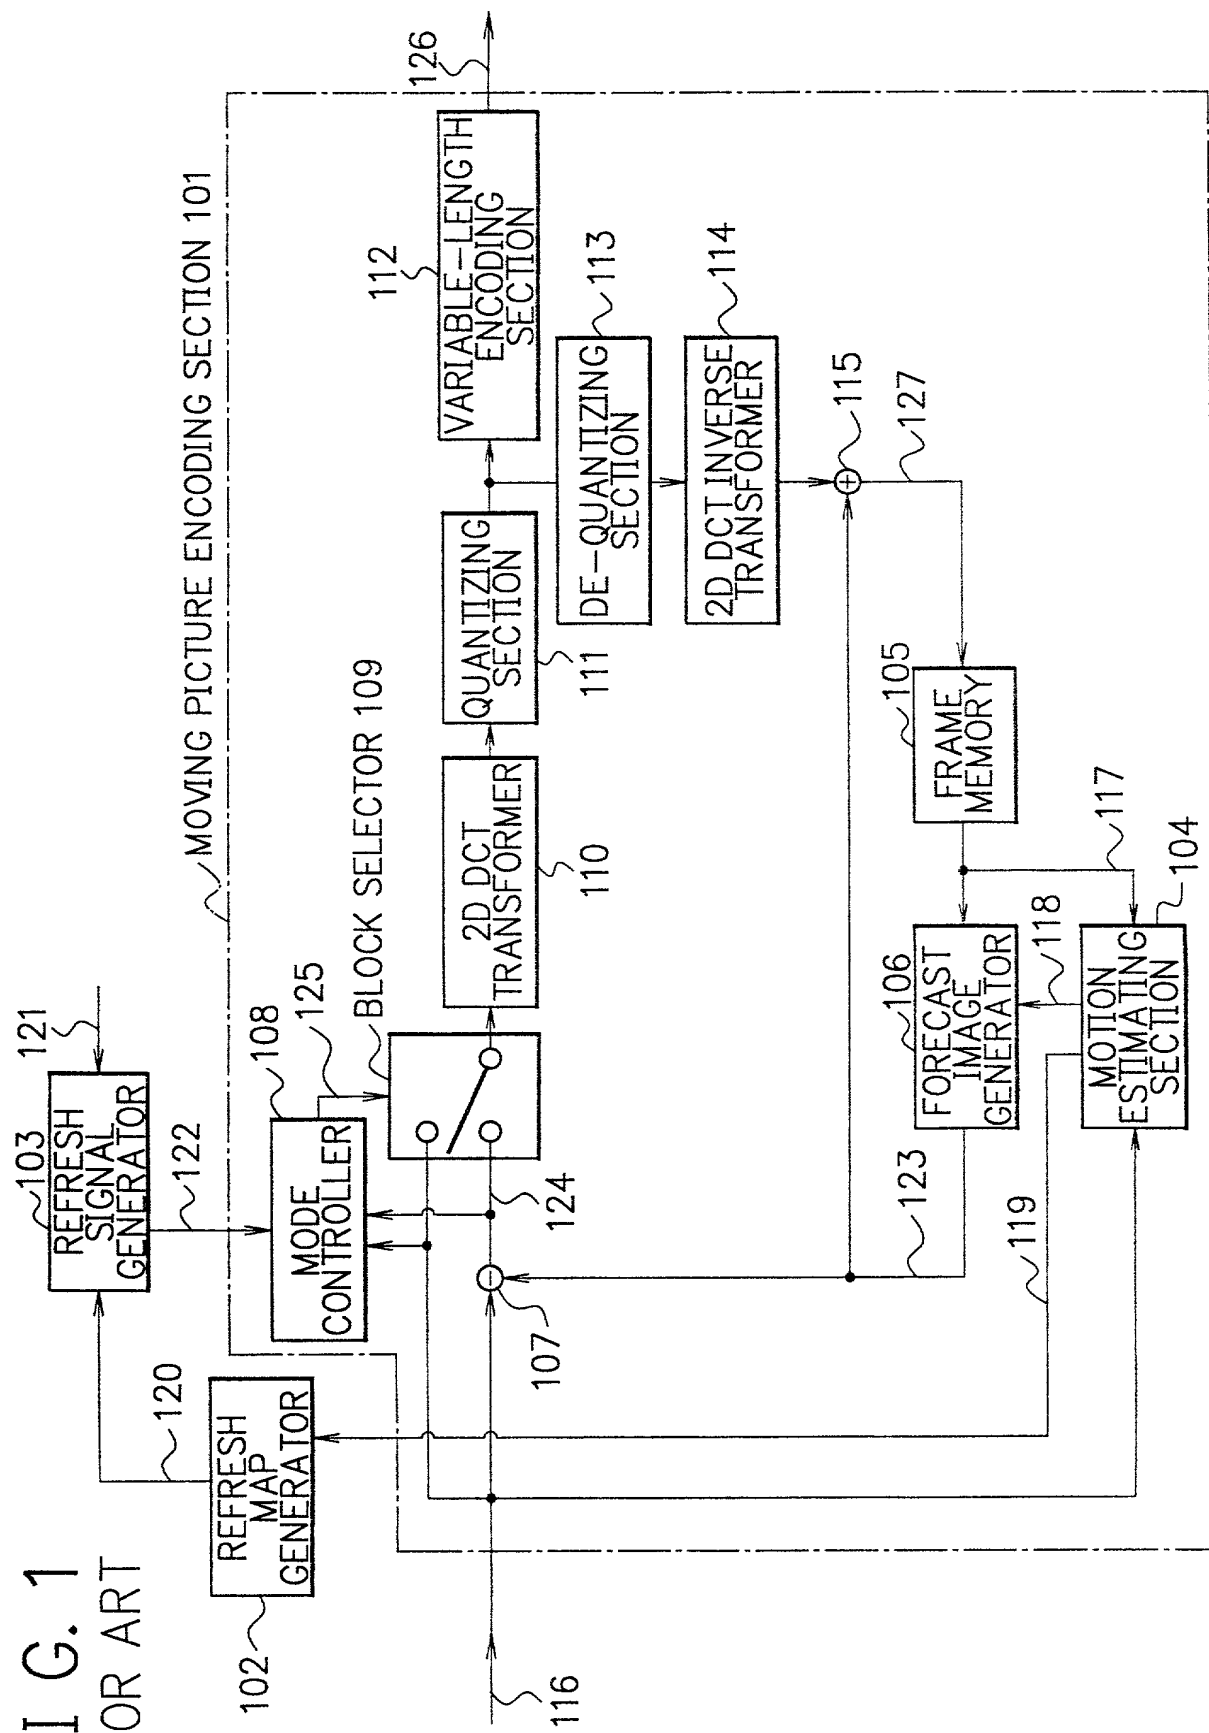


FIG. 2

PRIOR ART

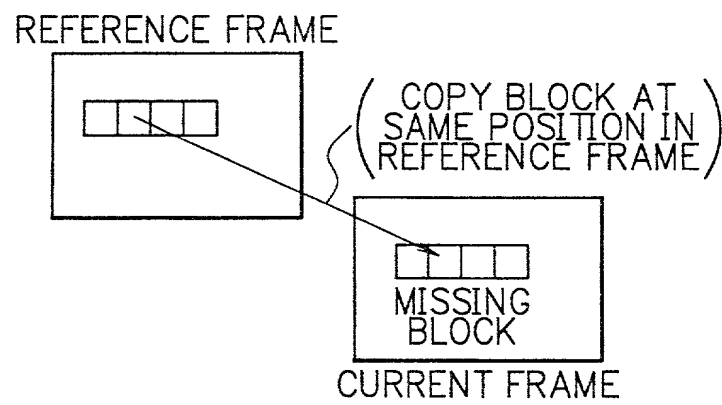


FIG. 3

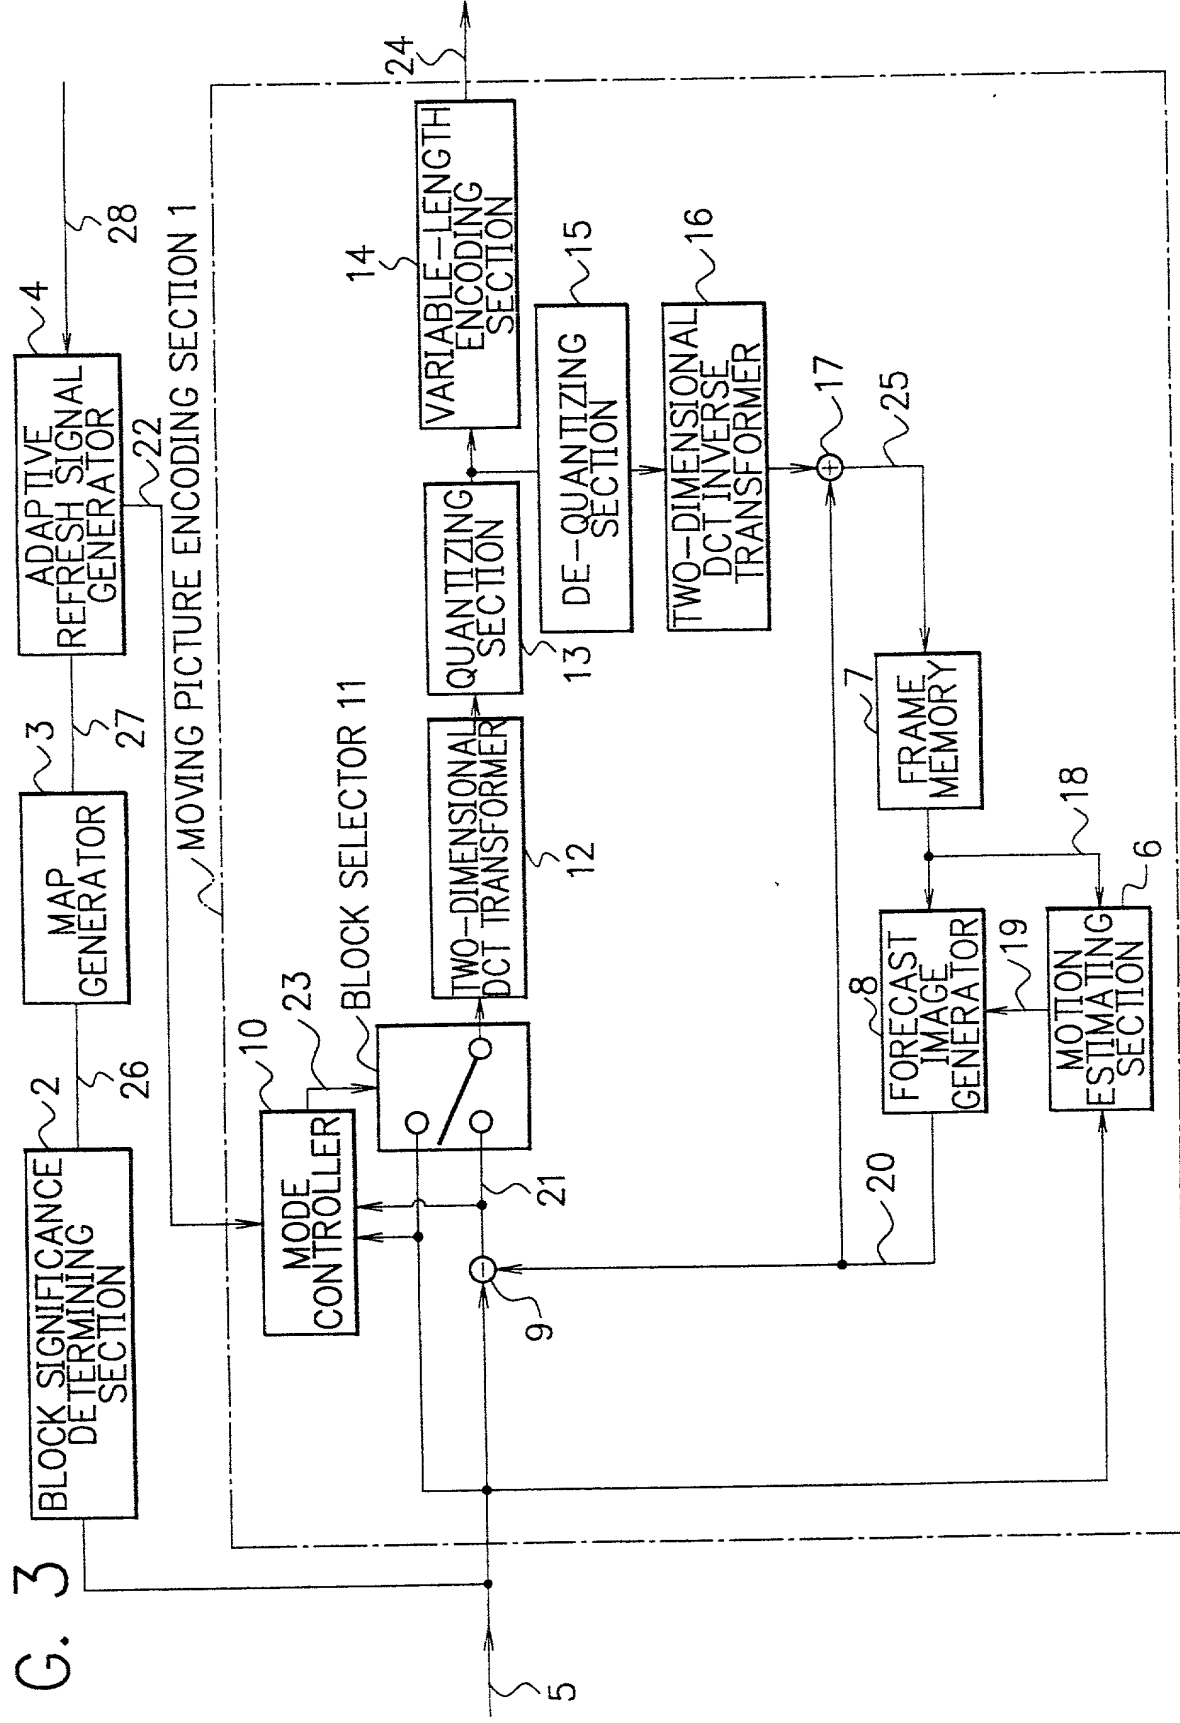


FIG. 4

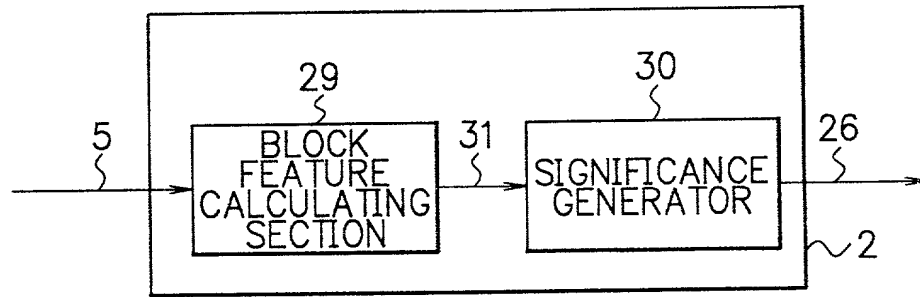


FIG. 5

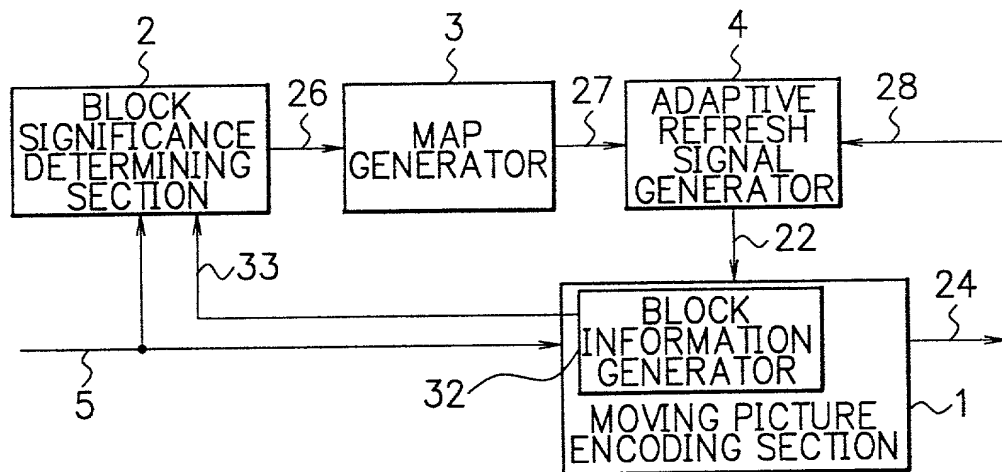


FIG. 6

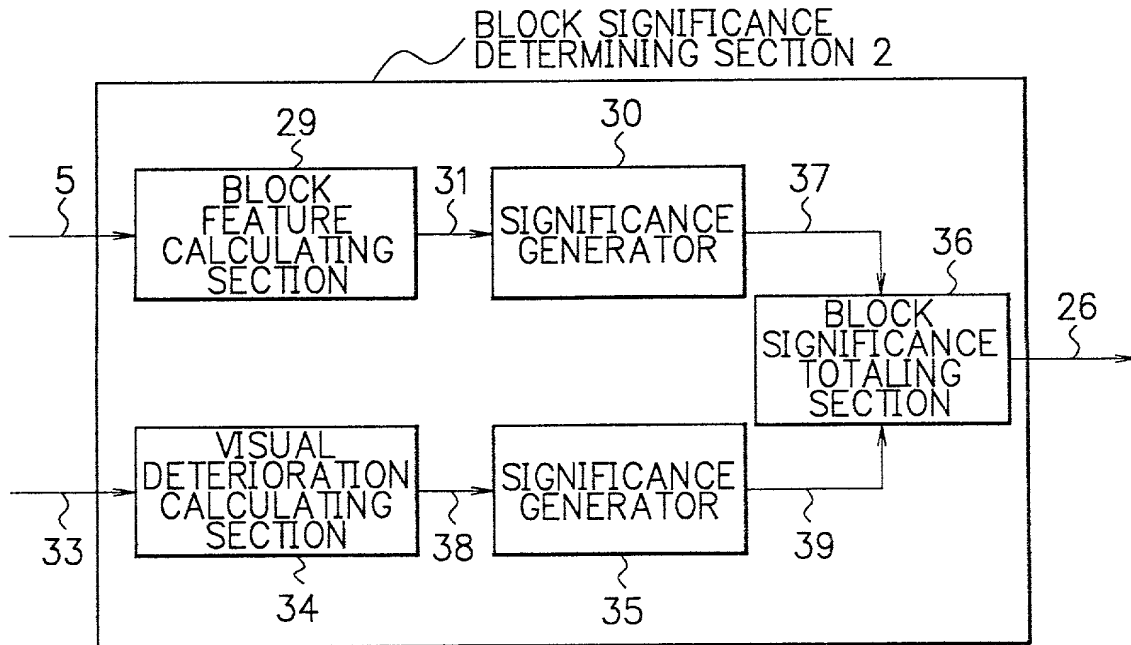


FIG. 7

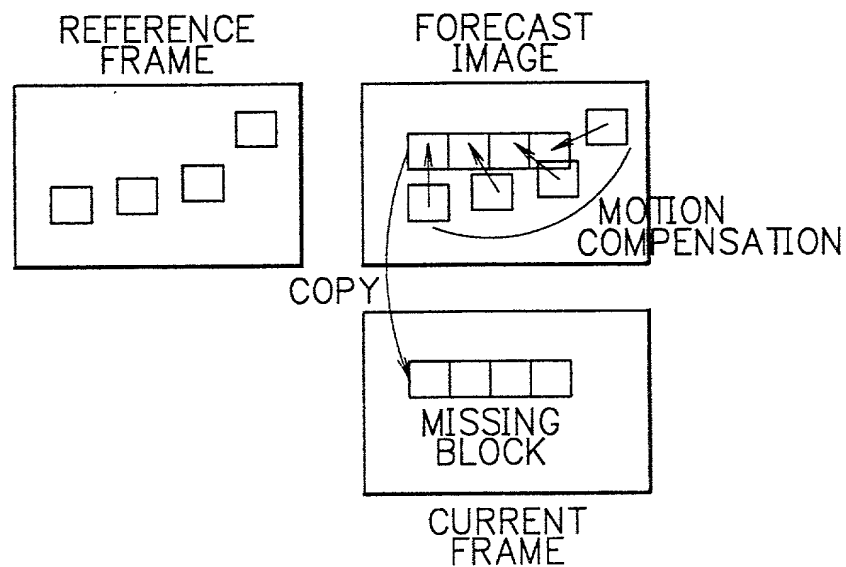


FIG. 8


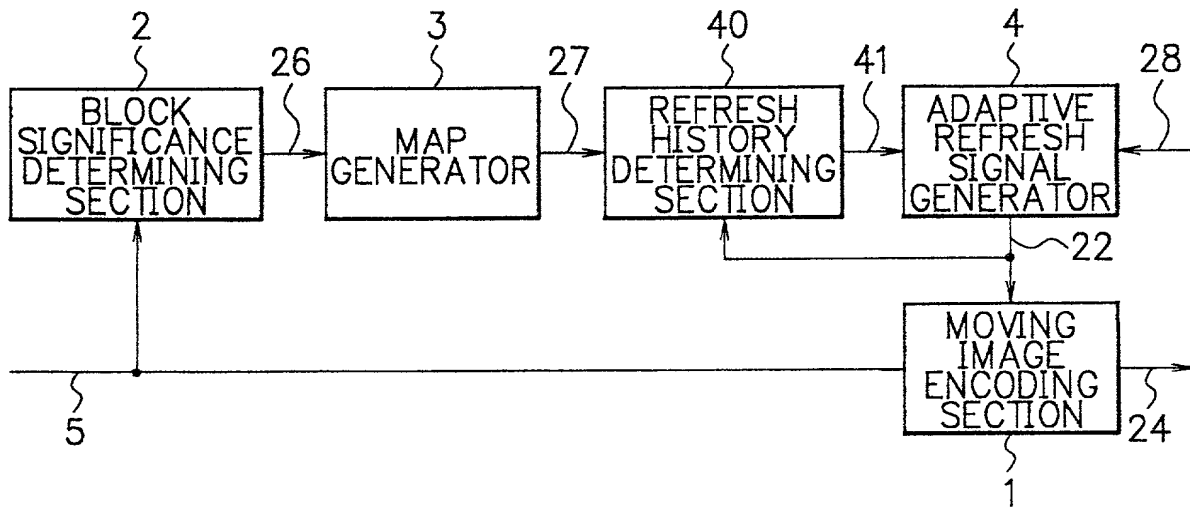


FIG. 9

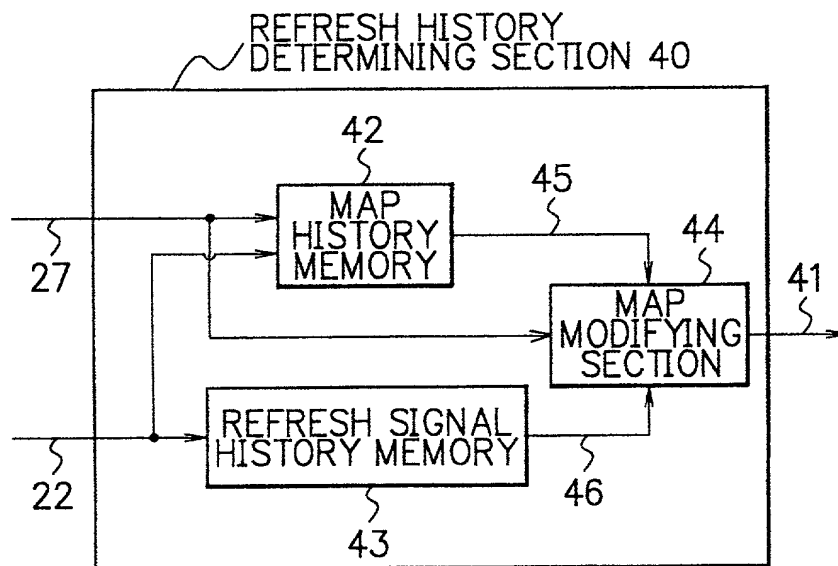

UNITED STATES OF AMERICA		OFGS FILE NO.	
COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION		P/1909-122	
<p>As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:</p> <p style="text-align: center;"><u>MOVING PICTURE ENCODING APPARATUS</u></p>			
<p>the specification of which is attached hereto, unless the following box is checked:</p> <p><input type="checkbox"/> was filed on _____ as United States patent Application Number or PCT International patent application number _____ and was amended on _____ (if any).</p>			
<p>I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.</p> <p>I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.</p> <p>I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:</p>			
Prior Foreign or Provisional Application(s)			
COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Japan	001508/1999	6, 1, 1999	YES <u>X</u> NO _____
			YES _____ NO _____
			YES _____ NO _____
<p>I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.</p>			
UNITED STATES APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)	
<p>I hereby appoint OSTROLENK, FABER, GERB & SOFFEN, and the members of the firm, Marvin C. Soffen - Reg. No. 17,542; Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,653; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberstein - Reg. No. 22,400; Steven I. Weisburd - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffen - Reg. No. 31,063; James A. Finder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944 and Louis C. Dujmich - Reg. No. 30,625, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent & Trademark Office connected therewith and to receive all correspondence.</p>			
SEND CORRESPONDENCE TO:		DIRECT TELEPHONE CALLS TO:	
OSTROLENK, FABER, GERB & SOFFEN 1180 AVENUE OF THE AMERICAS NEW YORK, NEW YORK 10036-8403		(212) 382-0700	
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.</p>			
FULL NAME OF SOLE OR FIRST INVENTOR TAKAHIRO KIMOTO		INVENTOR'S SIGNATURE <i>Takahiro Kimoto</i>	DATE 12/22/99
RESIDENCE Tokyo, Japan		COUNTRY OF CITIZENSHIP Japan	
POST OFFICE ADDRESS c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan			
FULL NAME OF SECOND JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	DATE
RESIDENCE		COUNTRY OF CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF THIRD JOINT INVENTOR (IF ANY)		INVENTOR'S SIGNATURE	DATE
RESIDENCE		COUNTRY OF CITIZENSHIP	
POST OFFICE ADDRESS			